




INTERIOR WAYFINDING **GUIDELINES**

University Planning, Design and Construction
Established: April 2024

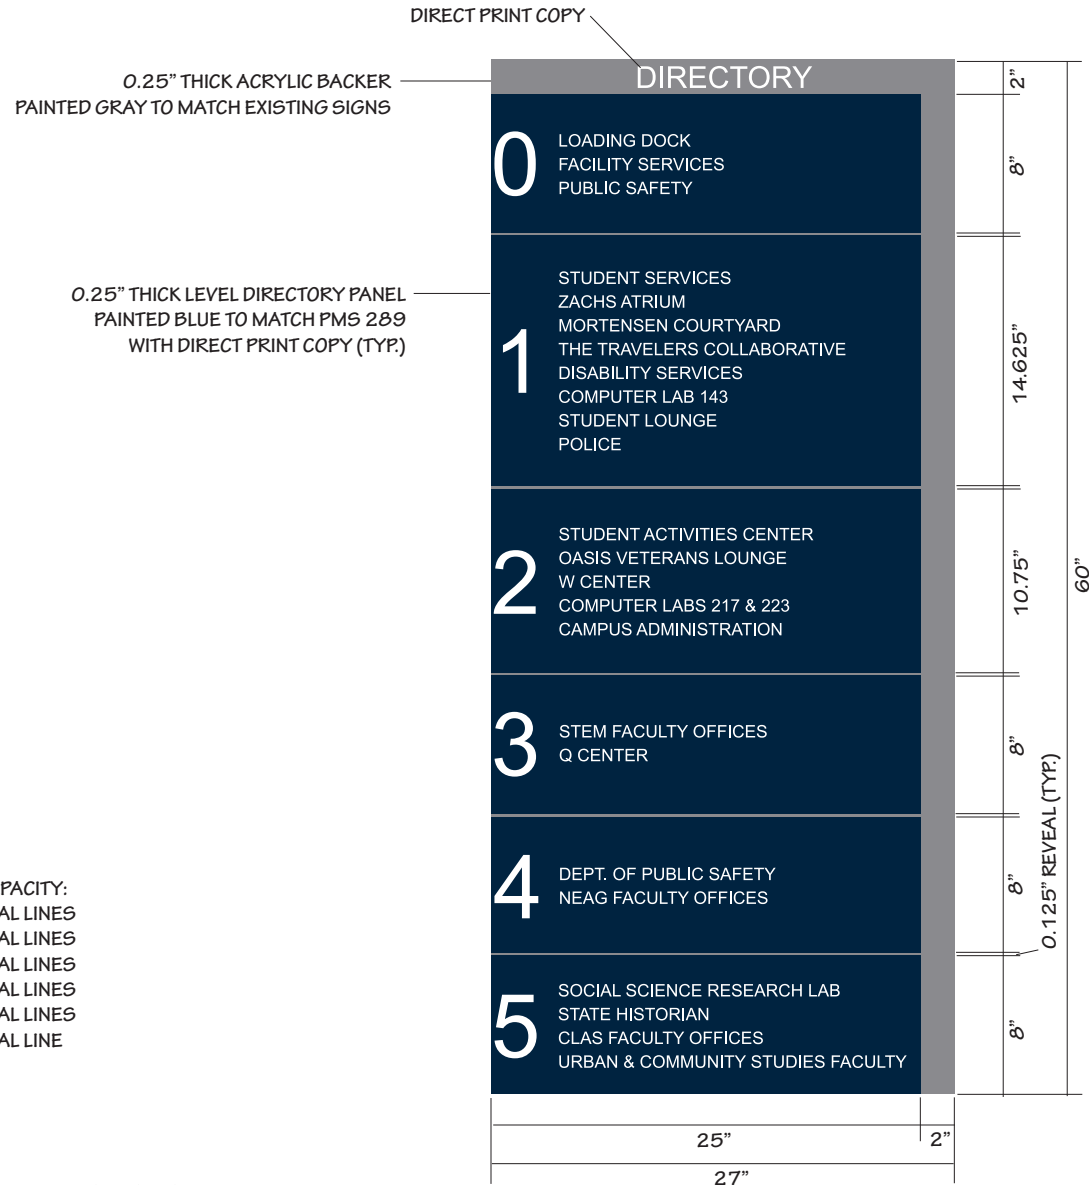

PANEL EXPANSION CAPACITY:
LEVEL 0 - 2 ADDITIONAL LINES
LEVEL 1 - 2 ADDITIONAL LINES
LEVEL 2 - 2 ADDITIONAL LINES
LEVEL 3 - 3 ADDITIONAL LINES
LEVEL 4 - 3 ADDITIONAL LINES
LEVEL 5 - 1 ADDITIONAL LINE

MOUNTING: CONCEALED MECHANICAL FASTENERS

TITLE:

SIGN TYPE A
FLOOR DIRECTORY
CONCEPTUAL

SCALE: 8%

**MOUNTING: CONCEALED
MECHANICAL FASTENERS**

DIRECT PRINTED COPY

LEVEL 2



OASIS VETERANS LOUNGE



RESTROOMS



COMPUTER LABS

217 & 223



W CENTER

2"

4.25"
(TYP.)

VARIES WITH NUMBER OF STRIPS
(SEE TABLE)

21"
23"

2"


| NO.OF INSERT STRIPS | TOTAL FINISHED HEIGHT |
|---------------------------|-----------------------------|
| 2 | 10.5" |
| 3 | 14.75" |
| 4 | 19" |
| 5 | 23.25" |
| 6 | 27.5" |
| 7 | 31.75" |
| 8 | 36" |
| 9 | 40.25" |

TITLE:


SIGN TYPE B

DIRECTIONAL SIGNS

SCALE: 20%

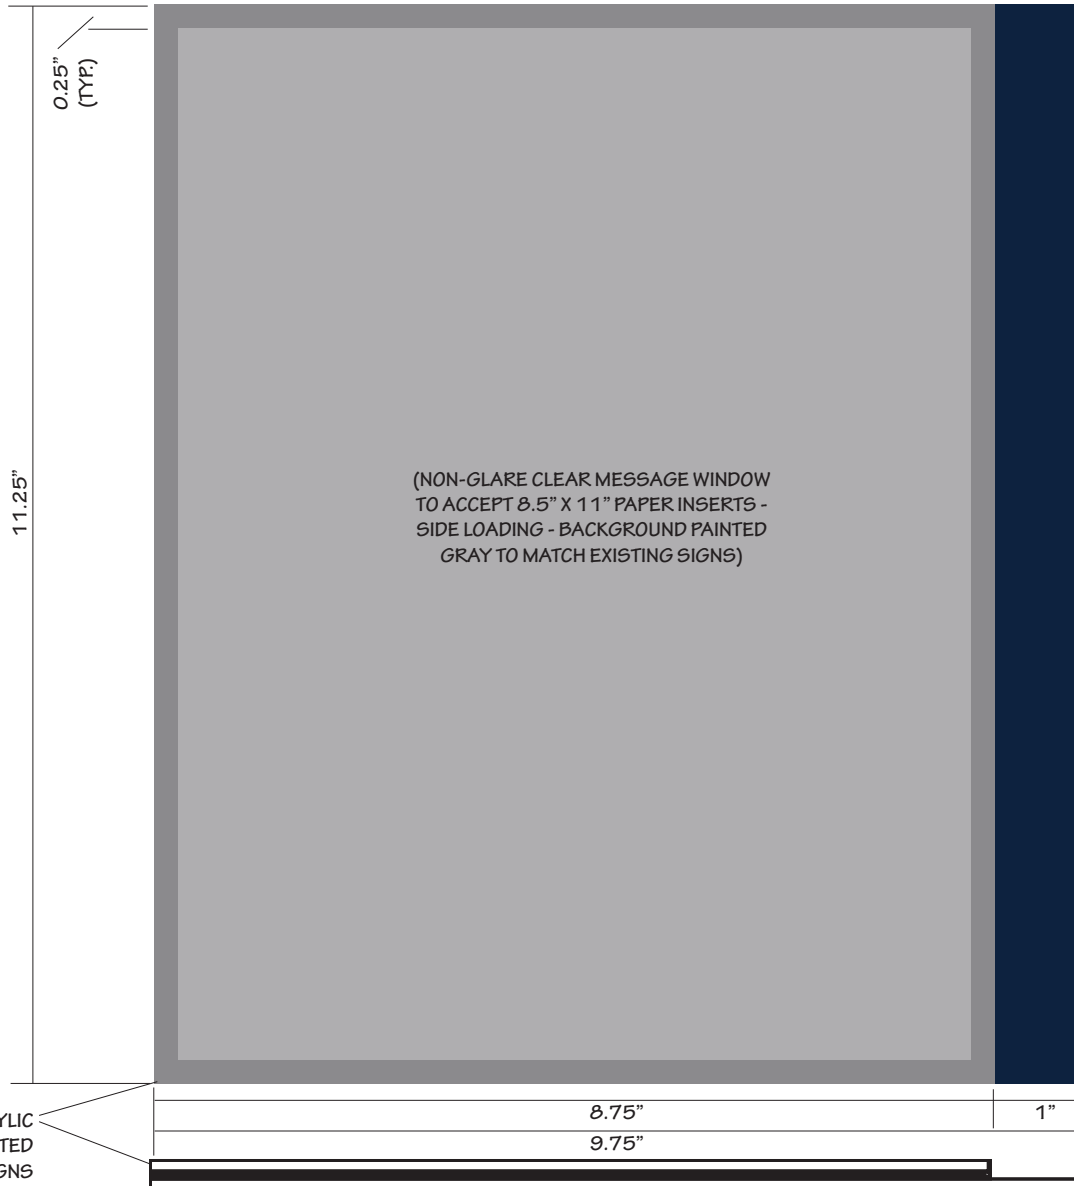

EXAMPLE WITH PRINTED
PAPER INSERT:

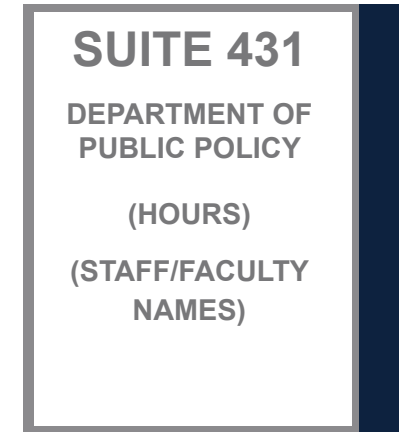

TITLE:
SIGN TYPE C
SUITE SIGN
SCALE: 50%



Sign Type
ELEVATOR

NOTES


Font:
Arial Regular

MATERIALS

.125" acrylic layers
Tactile graphics
Grade 2 Braille

Installation Method

VHB tape and silicone

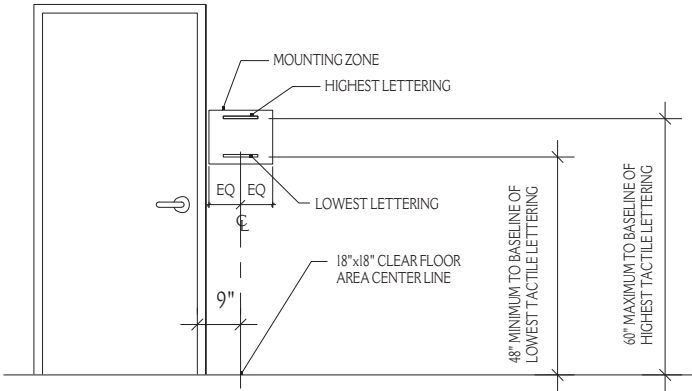


- SIGNS TO BE INSTALLED ON LATCH SIDE OF DOOR (NOTE ON PLANS).
- WHERE THERE IS NO WALL SPACE TO THE LATCH SIDE OF THE DOOR, SIGNS SHALL BE PLACED ON NEAREST ADJACENT WALL (NOTE ON PLANS).
- MOUNT ALL SIGNS SO TOP OF SIGN IS AT THE SAME HEIGHT FOR ALL SPACES.
- *INSTALLATION METHOD*
ROOM SIGNS ARE INSTALLED USING DOUBLE FACE TAPE AND SILICONE.
IF WALL SURFACE WILL NOT ACCEPT THIS MOUNTING METHOD THEN MECHANICAL BACKER WILL BE USED. (NOTE ON PLANS)

Note: For preliminary design purposes only.
Accurate field survey and dimension verification
required before beginning construction.


| NAVY BLUE | WHITE | GREY |
|---|-----------------------------|--|
| PANTONE 289 COATED C100 M76 Y12 K70 | OPAQUE WHITE CO MO YO KO | PANTONE 430 COATED C33 M18 Y13 K40 |
| PANTONE 289 UNCOATED C97 M63 Y13 K41 | R255 G255 B255 #FFFFFF | PANTONE 430 UNCOATED C47 M31 Y29 K4 |
| R0 G14 B47 #000E2F | | R124 G135 B142 #7CB78E |

TYPICAL
SIGNAGE LOCATION

NOT TO SCALE

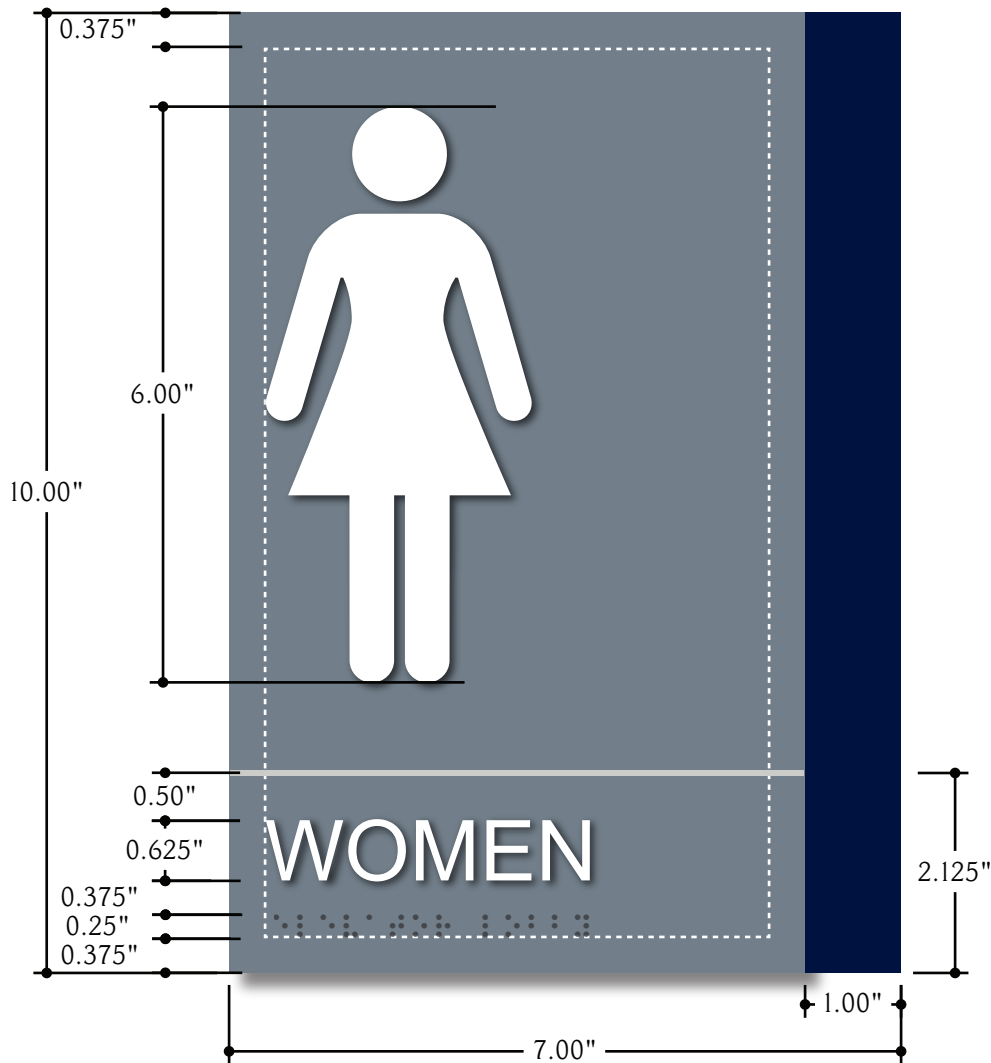


Scale: 1/2"=1"

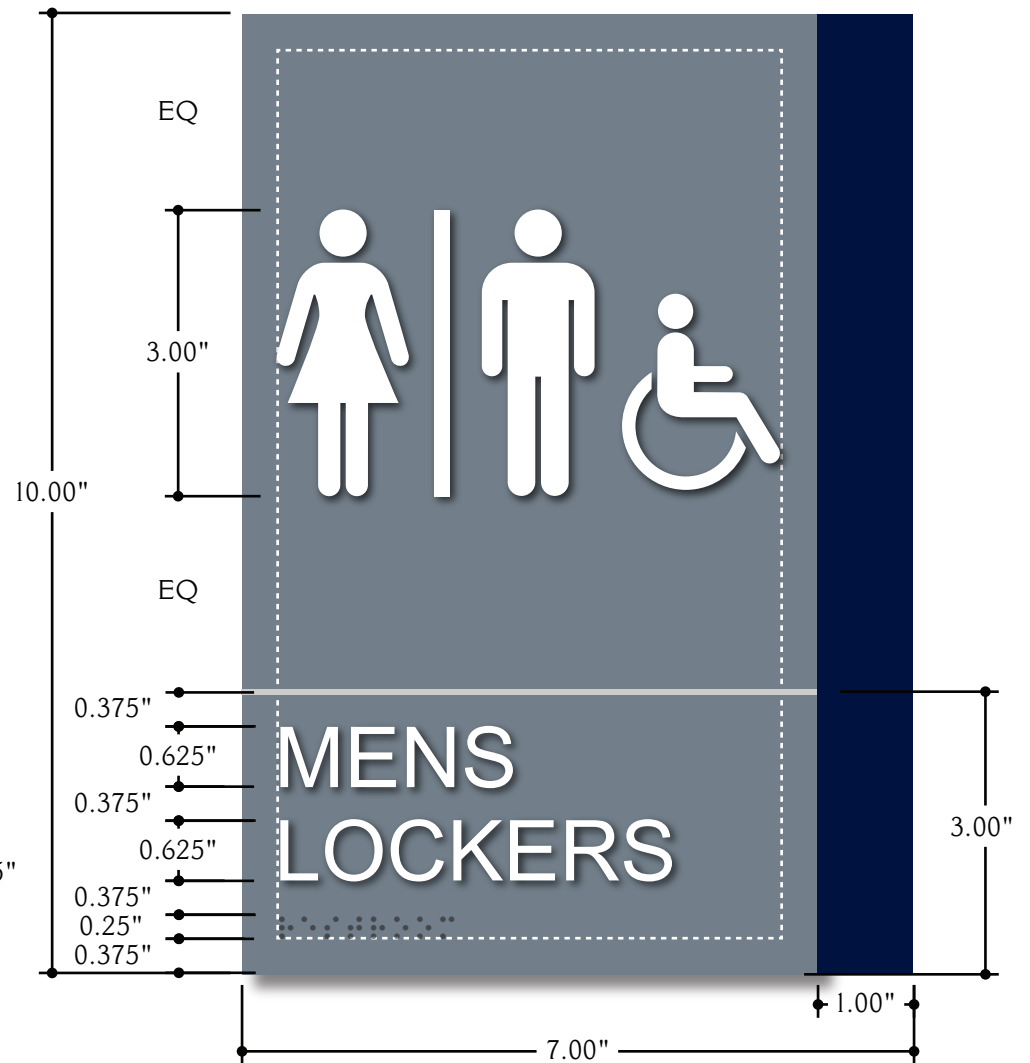

ALTERNATE ADDITION

Sign Type
Restroom / Locker Room Sign
 ADA compliant.

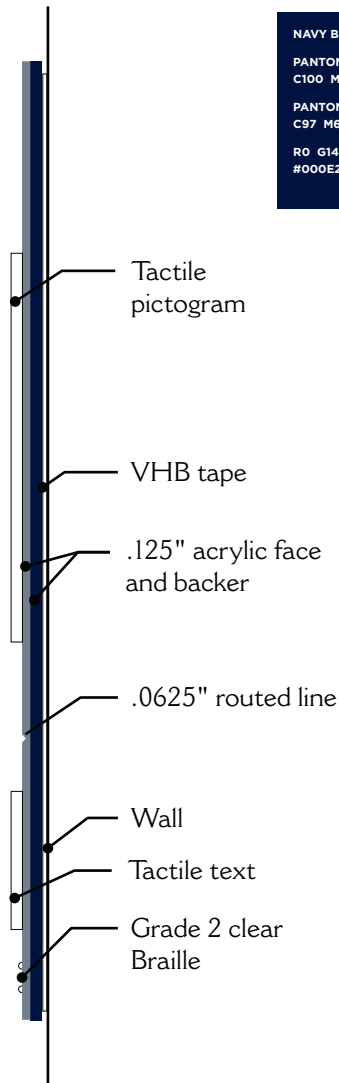

TYPICAL MOUNTING

Note: For preliminary design purposes only.
Accurate field survey and dimension verification
required before beginning construction.

| NAVY BLUE | WHITE | GREY |
|---|-----------------------------|--|
| PANTONE 289 COATED C100 M76 Y12 K70 | OPAQUE WHITE CO M0 Y0 K0 | PANTONE 430 COATED C33 M18 Y13 K40 |
| PANTONE 289 UNCOATED C97 M63 Y13 K41 | R255 G255 B255 #FFFFFF | PANTONE 430 UNCOATED C47 M31 Y29 K4 |
| R0 G14 B47 #000E2F | | R124 G135 B142 #7C878E |

NOTES

Font:
Arial Regular

MATERIALS


.125" acrylic layers
Tactile graphics
Grade 2 Braille

Installation Method

VHB tape and silicone





Scale: 1/4"=1"

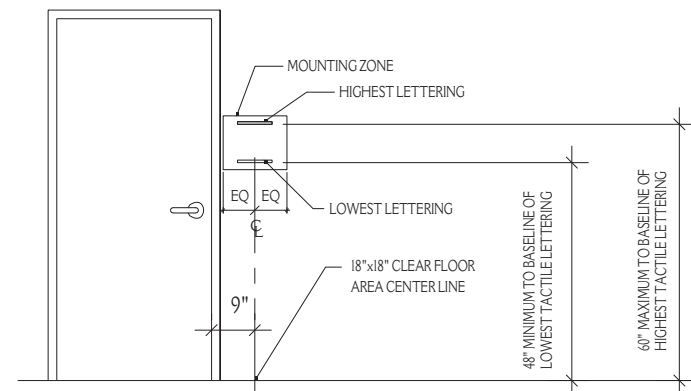

- SIGNS TO BE INSTALLED ON LATCH SIDE OF DOOR (NOTE ON PLANS).
- WHERE THERE IS NO WALL SPACE TO THE LATCH SIDE OF THE DOOR, SIGNS SHALL BE PLACED ON NEAREST ADJACENT WALL (NOTE ON PLANS).
- MOUNT ALL SIGNS SO TOP OF SIGN IS AT THE SAME HEIGHT FOR ALL SPACES.
- **INSTALLATION METHOD**
ROOM SIGNS ARE INSTALLED USING DOUBLE FACE VHB TAPE AND SILICONE. IF WALL SURFACE WILL NOT ACCEPT THIS MOUNTING METHOD THEN MECHANICAL BACKER WILL BE USED. (NOTE ON PLANS)

TYPICAL SIGNAGE LOCATION

NOT TO SCALE

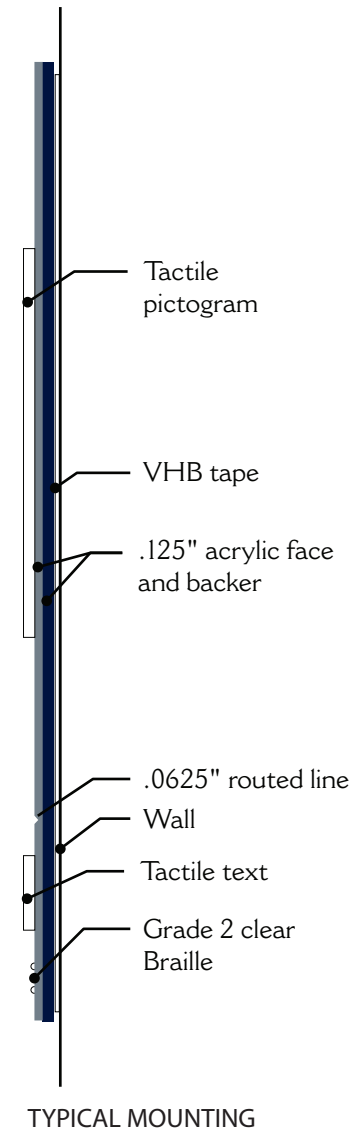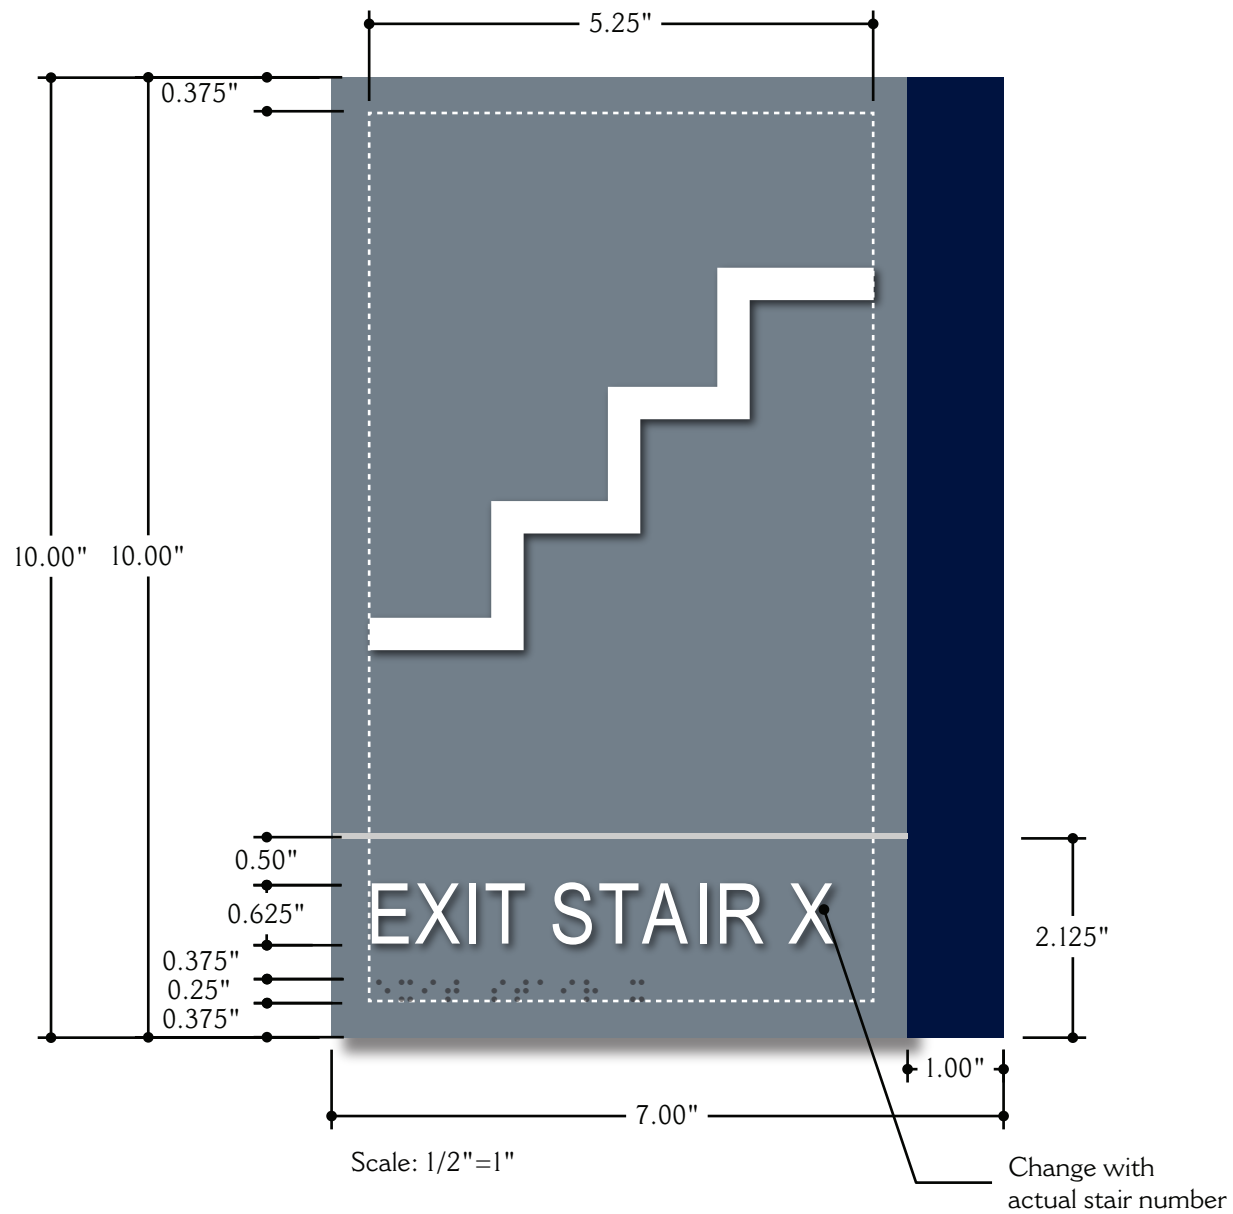

Sign Type

Stair Identification Sign

ADA compliant.

NOTES


Font:
Arial Narrow

MATERIALS

.125" acrylic layers
Tactile graphics
Grade 2 Braille

Note: For preliminary design purposes only.
Accurate field survey and dimension verification
required before beginning construction.

6

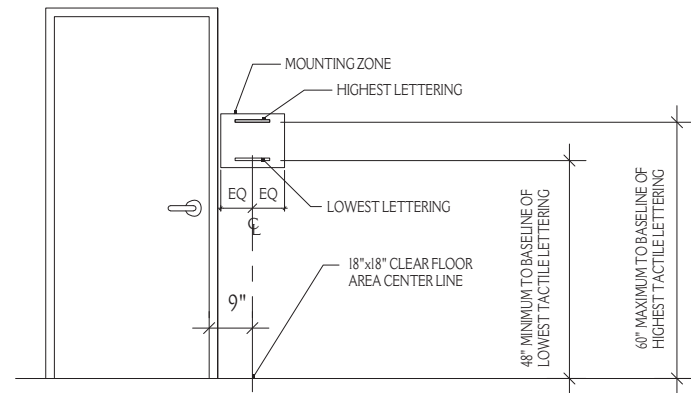



- SIGNS TO BE INSTALLED ON LATCH SIDE OF DOOR (NOTE ON PLANS).
- WHERE THERE IS NO WALL SPACE TO THE LATCH SIDE OF THE DOOR, SIGNS SHALL BE PLACED ON NEAREST ADJACENT WALL (NOTE ON PLANS).
- MOUNT ALL SIGNS SO TOP OF SIGN IS AT THE SAME HEIGHT FOR ALL SPACES.
- **INSTALLATION METHOD**
ROOM SIGNS ARE INSTALLED USING DOUBLE FACE TAPE AND SILICONE. IF WALL SURFACE WILL NOT ACCEPT THIS MOUNTING METHOD THEN MECHANICAL BACKER WILL BE USED. (NOTE ON PLANS)

| NAVY BLUE | WHITE | GREY |
|---|-----------------------------|--|
| PANTONE 289 COATED C100 M76 Y12 K70 | OPAQUE WHITE CO MO YO KO | PANTONE 430 COATED C33 M18 Y13 K40 |
| PANTONE 289 UNCOATED C97 M63 Y13 K41 | R255 G255 B255 #FFFFFF | PANTONE 430 UNCOATED C47 M31 Y29 K4 |
| R0 G14 B47 #000E2F | | R124 G135 B142 #7CB78E |

Installation Method
VHB tape and silicone

TYPICAL SIGNAGE LOCATION

NOT TO SCALE

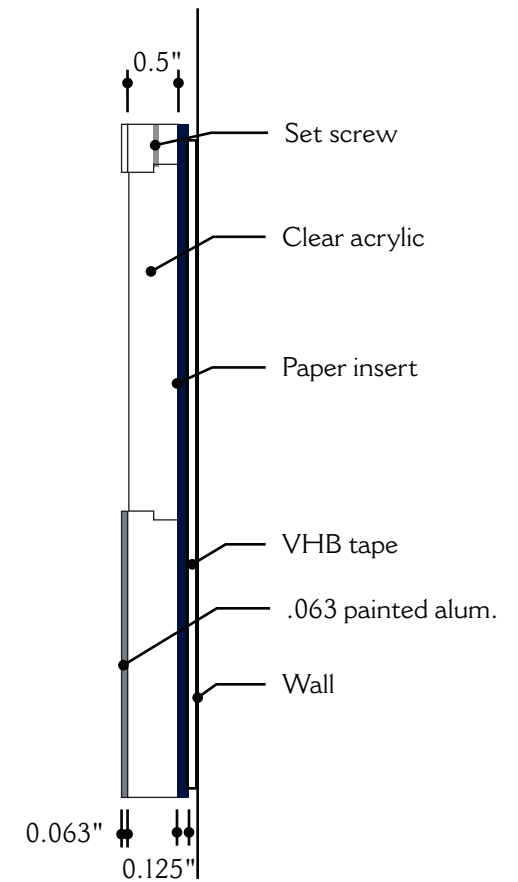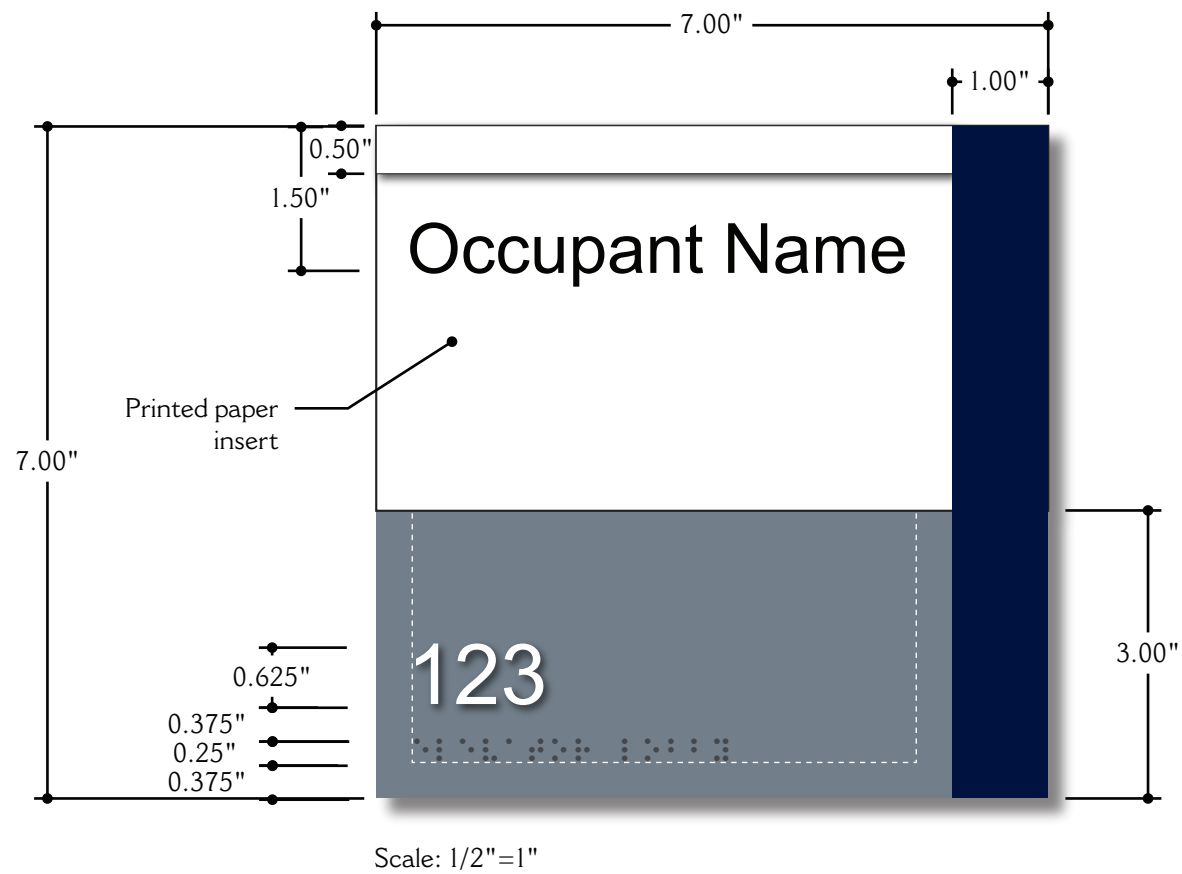

Sign Type

Office Sign

ADA compliant.


NOTES

Font:
Arial Regular

MATERIALS

.5" clear acrylic
.125" acrylic
.063" painted aluminum
Paper insert*
Tactile graphics
Grade 2 Braille

*Insert can be printed by customer
on standard printer using Microsoft
Word template

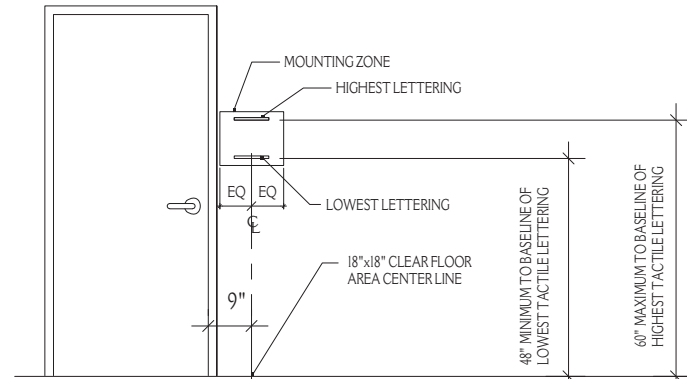

- SIGNS TO BE INSTALLED ON LATCH SIDE OF DOOR (NOTE ON PLANS).
- WHERE THERE IS NO WALL SPACE TO THE LATCH SIDE OF THE DOOR, SIGNS SHALL BE PLACED ON NEAREST ADJACENT WALL (NOTE ON PLANS).
- MOUNT ALL SIGNS SO TOP OF SIGN IS AT THE SAME HEIGHT FOR ALL SPACES.
- *INSTALLATION METHOD*
ROOM SIGNS ARE INSTALLED USING DOUBLE FACE VHB TAPE AND SILICONE. IF WALL SURFACE WILL NOT ACCEPT THIS MOUNTING METHOD THEN MECHANICAL BACKER WILL BE USED. (NOTE ON PLANS)



Note: For preliminary design purposes only.
Accurate field survey and dimension verification
required before beginning construction.

6

| NAVY BLUE | WHITE | GREY |
|---|-----------------------------|--|
| PANTONE 289 COATED C100 M76 Y12 K70 | OPAQUE WHITE C0 M0 Y0 K0 | PANTONE 430 COATED C33 M18 Y13 K40 |
| PANTONE 289 UNCOATED C97 M63 Y13 K41 | R255 G255 B255 #FFFFFF | PANTONE 430 UNCOATED C47 M31 Y29 K4 |
| R0 G14 B47 #000E2F | | R124 G135 B142 #7CB78E |

TYPICAL SIGNAGE LOCATION

NOT TO SCALE

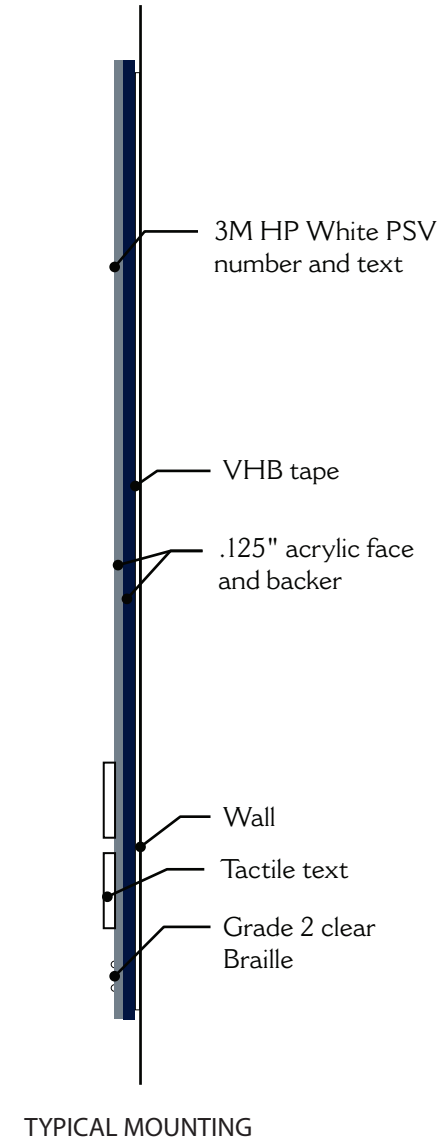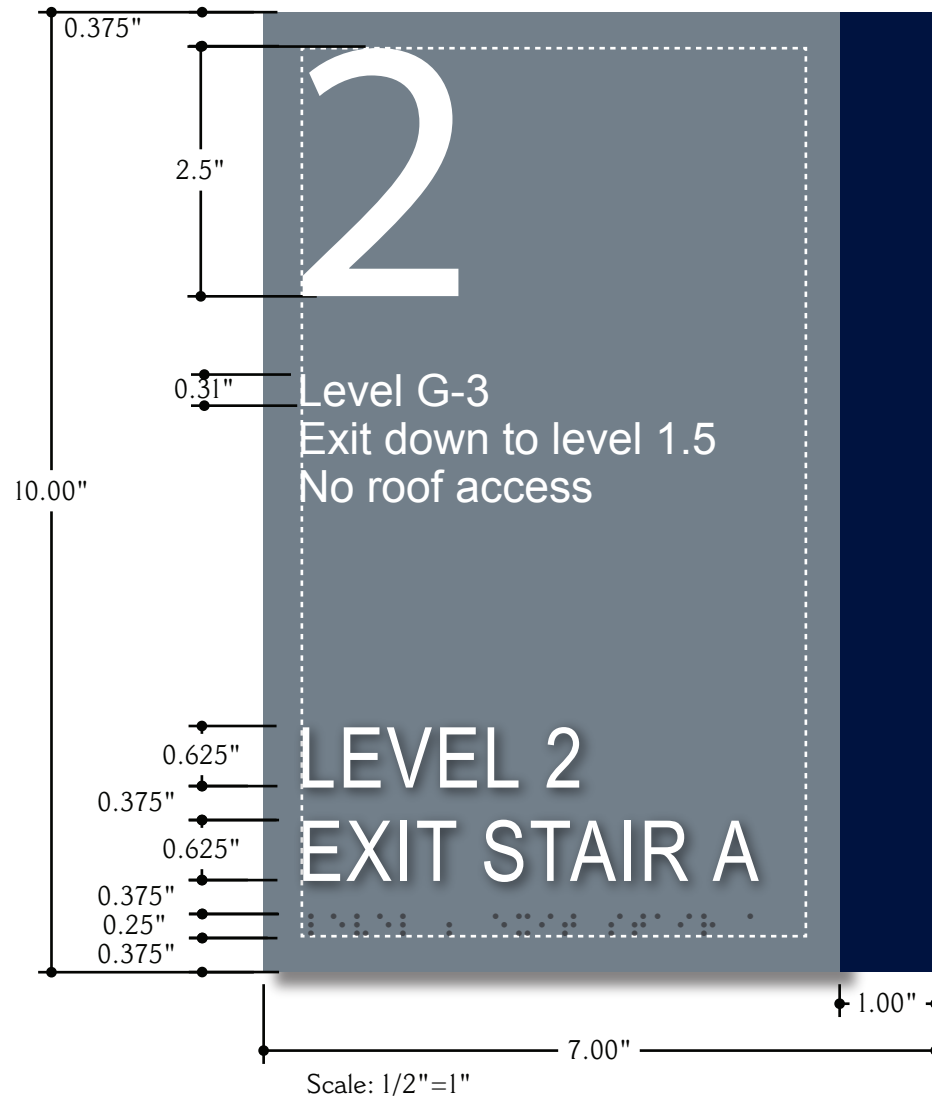


Sign Type
Stair Level Sign
 ADA compliant.

NOTES

Font:
Arial Regular
Arial Narrow Regular

MATERIALS

.125" acrylic layers
Tactile graphics
Grade 2 Braille
HP PSV

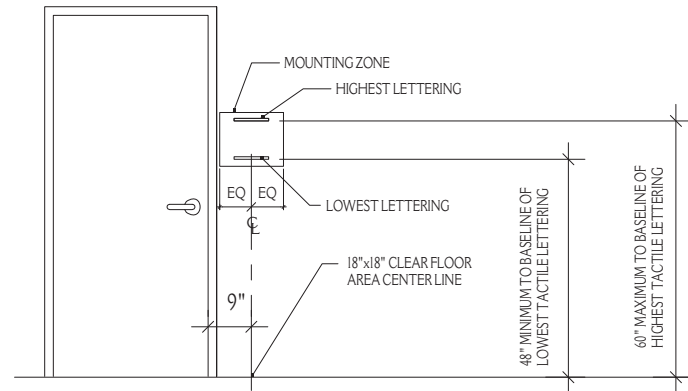

- SIGNS TO BE INSTALLED ON LATCH SIDE OF DOOR (NOTE ON PLANS).
- WHERE THERE IS NO WALL SPACE TO THE LATCH SIDE OF THE DOOR, SIGNS SHALL BE PLACED ON NEAREST ADJACENT WALL (NOTE ON PLANS).
- MOUNT ALL SIGNS SO TOP OF SIGN IS AT THE SAME HEIGHT FOR ALL SPACES.
- **INSTALLATION METHOD**
ROOM SIGNS ARE INSTALLED USING DOUBLE FACE VHB TAPE AND SILICONE. IF WALL SURFACE WILL NOT ACCEPT THIS MOUNTING METHOD THEN MECHANICAL BACKER WILL BE USED. (NOTE ON PLANS)


Note: For preliminary design purposes only.
Accurate field survey and dimension verification
required before beginning construction.

6


| NAVY BLUE | WHITE | GREY |
|---|-----------------------------|--|
| PANTONE 289 COATED C100 M76 Y12 K70 | OPAQUE WHITE CO MO YO KO | PANTONE 430 COATED C33 M18 Y13 K40 |
| PANTONE 289 UNCOATED C97 M63 Y13 K41 | R255 G255 B255 #FFFFFF | PANTONE 430 UNCOATED C47 M31 Y29 K4 |
| R0 G14 B47 #000E2F | | R124 G135 B142 #7CB78E |

TYPICAL SIGNAGE LOCATION

NOT TO SCALE

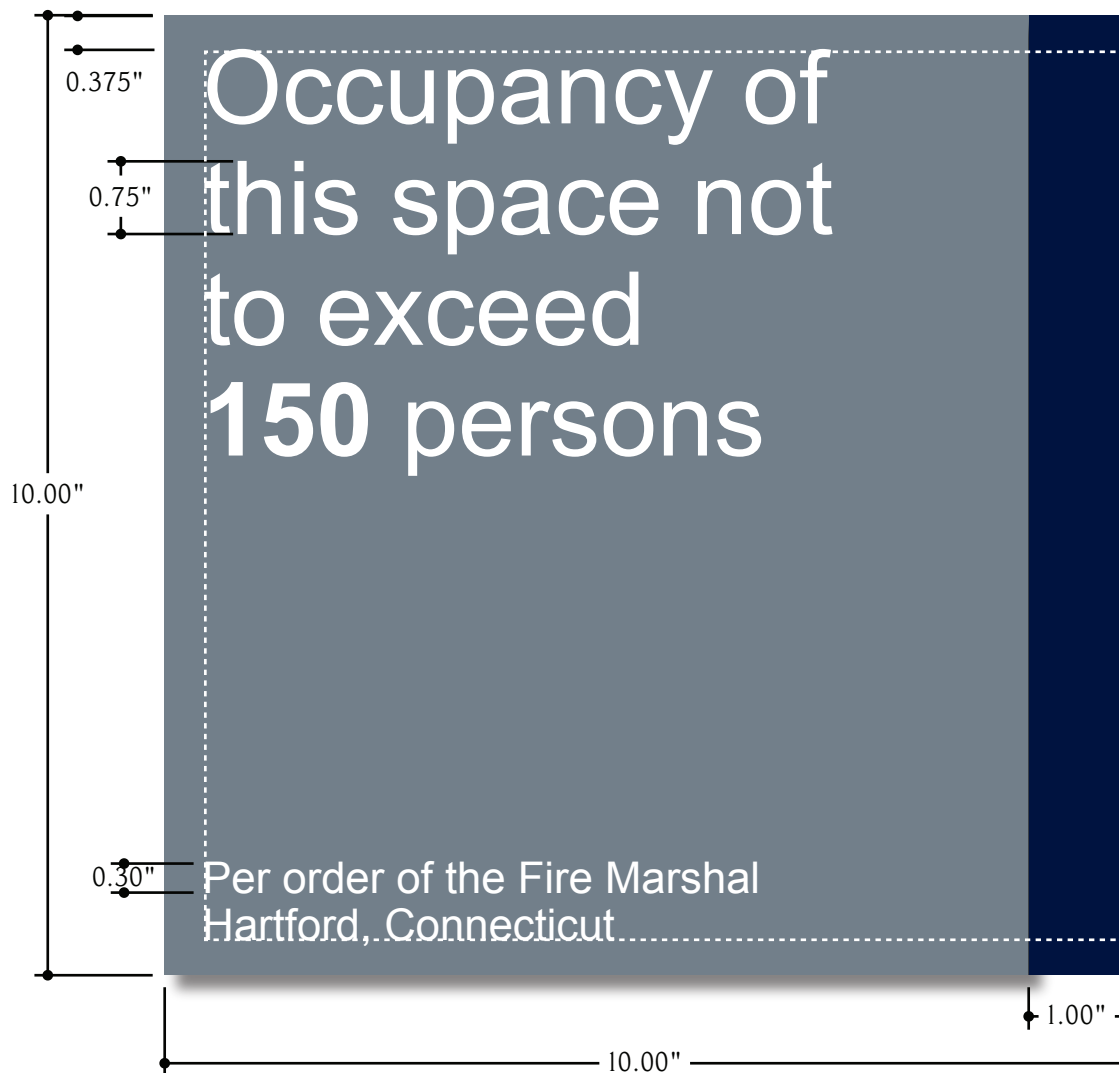

Scale: 1/2"=1"

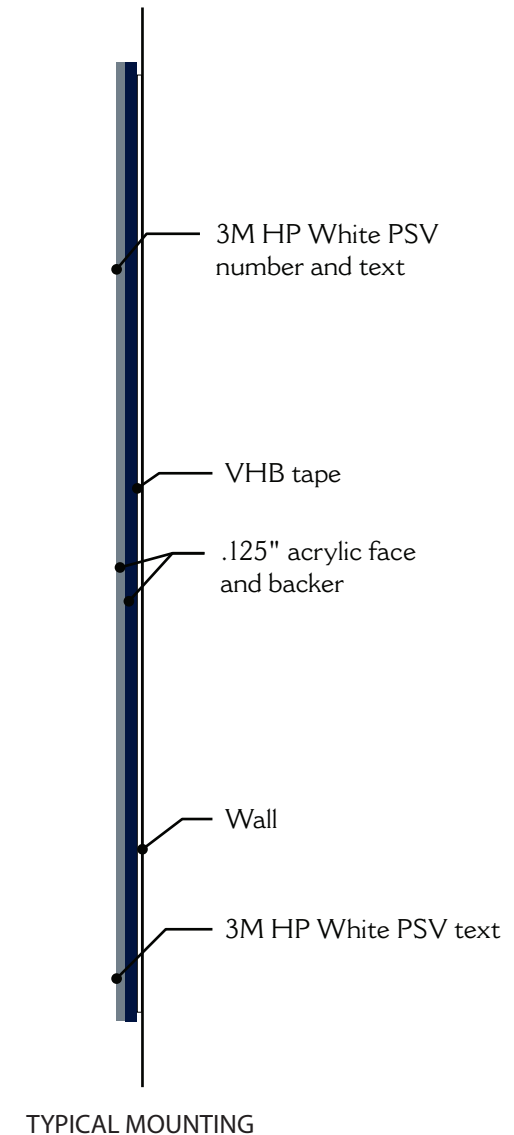

Sign Type

Max Occupancy Sign.


Non-ADA compliant.

NOTES

Font:
Arial Regular
Arial Bold (number)

MATERIALS

.125" acrylic layers
HP PSV

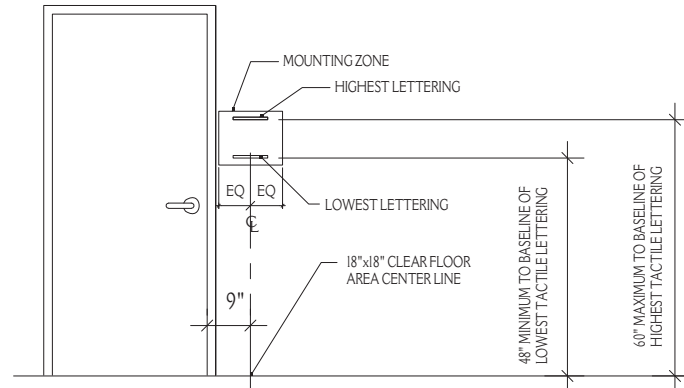

- SIGNS TO BE INSTALLED ON LATCH SIDE OF DOOR (NOTE ON PLANS).
- WHERE THERE IS NO WALL SPACE TO THE LATCH SIDE OF THE DOOR, SIGNS SHALL BE PLACED ON NEAREST ADJACENT WALL (NOTE ON PLANS).
- MOUNT ALL SIGNS SO TOP OF SIGN IS AT THE SAME HEIGHT FOR ALL SPACES.
- **INSTALLATION METHOD**
ROOM SIGNS ARE INSTALLED USING DOUBLE FACE VHB TAPE AND SILICONE. IF WALL SURFACE WILL NOT ACCEPT THIS MOUNTING METHOD THEN MECHANICAL BACKER WILL BE USED. (NOTE ON PLANS)


Note: For preliminary design purposes only.
Accurate field survey and dimension verification
required before beginning construction.

6

| NAVY BLUE | WHITE | GREY |
|---|-----------------------------|--|
| PANTONE 289 COATED C100 M76 Y12 K70 | OPAQUE WHITE CO MO YO KO | PANTONE 430 COATED C33 M18 Y13 K40 |
| PANTONE 289 UNCOATED C97 M63 Y13 K41 | R255 G255 B255 #FFFFFF | PANTONE 430 UNCOATED C47 M31 Y29 K4 |
| RO G14 B47 #000E2F | | R124 G135 B142 #7C878E |

TYPICAL SIGNAGE LOCATION

NOT TO SCALE

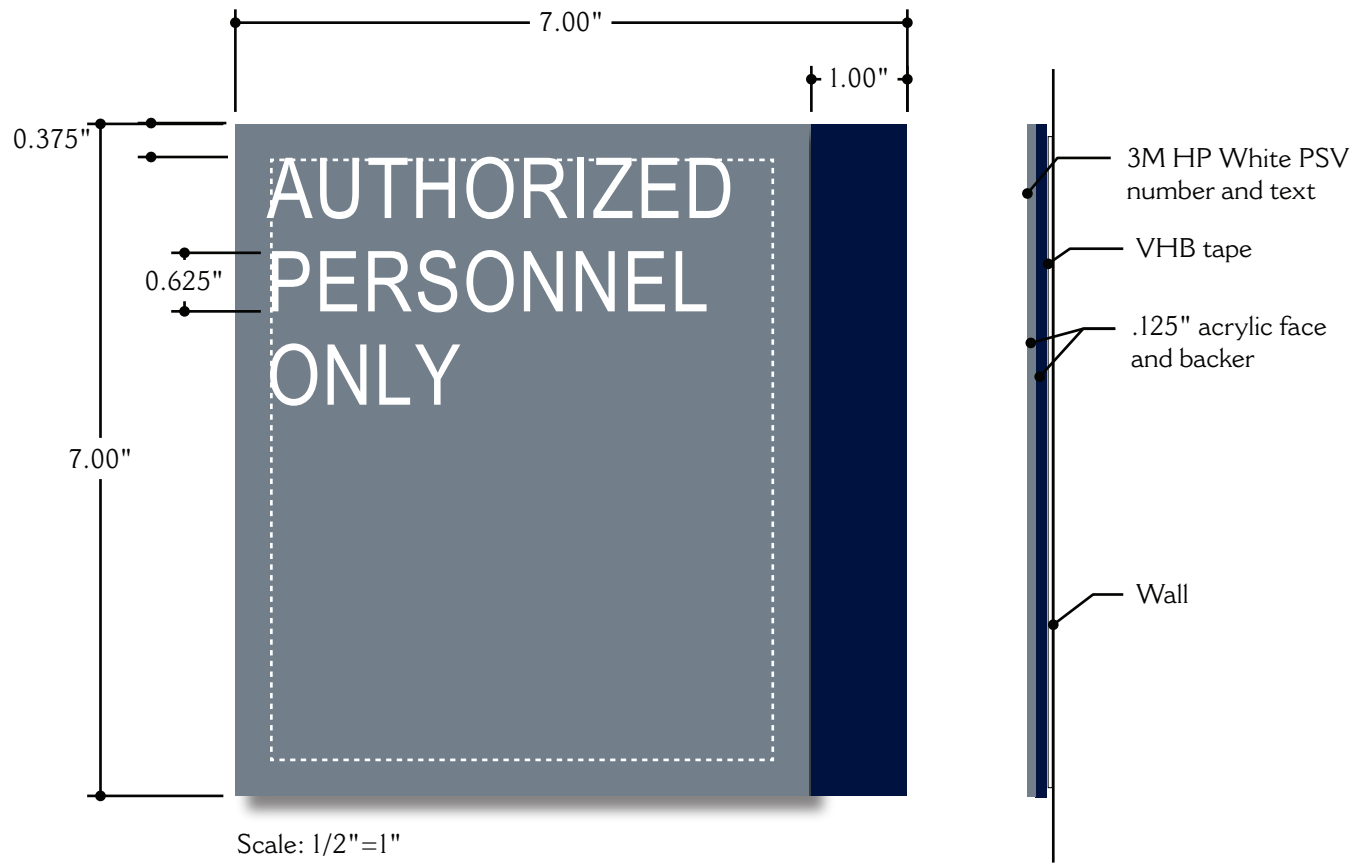

Sign Type

Authorized Personnel Only Sign


Non-ADA compliant

NOTES

Font:
Arial Narrow

MATERIALS

.125" acrylic layers
HP PSV

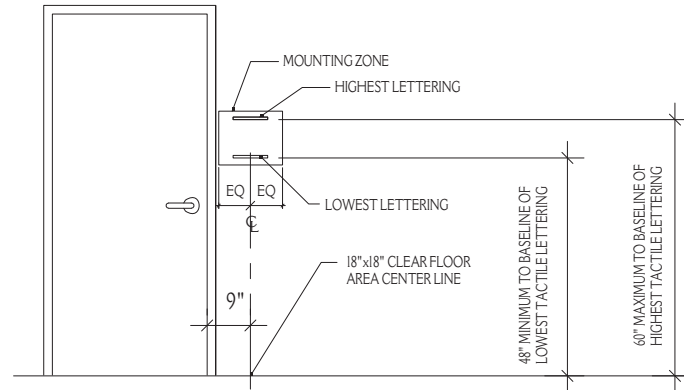

- SIGNS TO BE INSTALLED ON LATCH SIDE OF DOOR (NOTE ON PLANS).
- WHERE THERE IS NO WALL SPACE TO THE LATCH SIDE OF THE DOOR, SIGNS SHALL BE PLACED ON NEAREST ADJACENT WALL (NOTE ON PLANS).
- MOUNT ALL SIGNS SO TOP OF SIGN IS AT THE SAME HEIGHT FOR ALL SPACES.
- *INSTALLATION METHOD*
ROOM SIGNS ARE INSTALLED USING DOUBLE FACE VHB TAPE AND SILICONE. IF WALL SURFACE WILL NOT ACCEPT THIS MOUNTING METHOD THEN MECHANICAL BACKER WILL BE USED. (NOTE ON PLAN)


Note: For preliminary design purposes only.
Accurate field survey and dimension verification
required before beginning construction.

6

| NAVY BLUE | WHITE | GREY |
|---|-----------------------------|--|
| PANTONE 289 COATED C100 M76 Y12 K70 | OPAQUE WHITE C0 M0 Y0 K0 | PANTONE 430 COATED C33 M18 Y13 K40 |
| PANTONE 289 UNCOATED C97 M63 Y13 K41 | R255 G255 B255 #FFFFFF | PANTONE 430 UNCOATED C47 M31 Y29 K4 |
| R0 G14 B47 #000E2F | | R124 G135 B142 #7CB78E |

TYPICAL SIGNAGE LOCATION

NOT TO SCALE

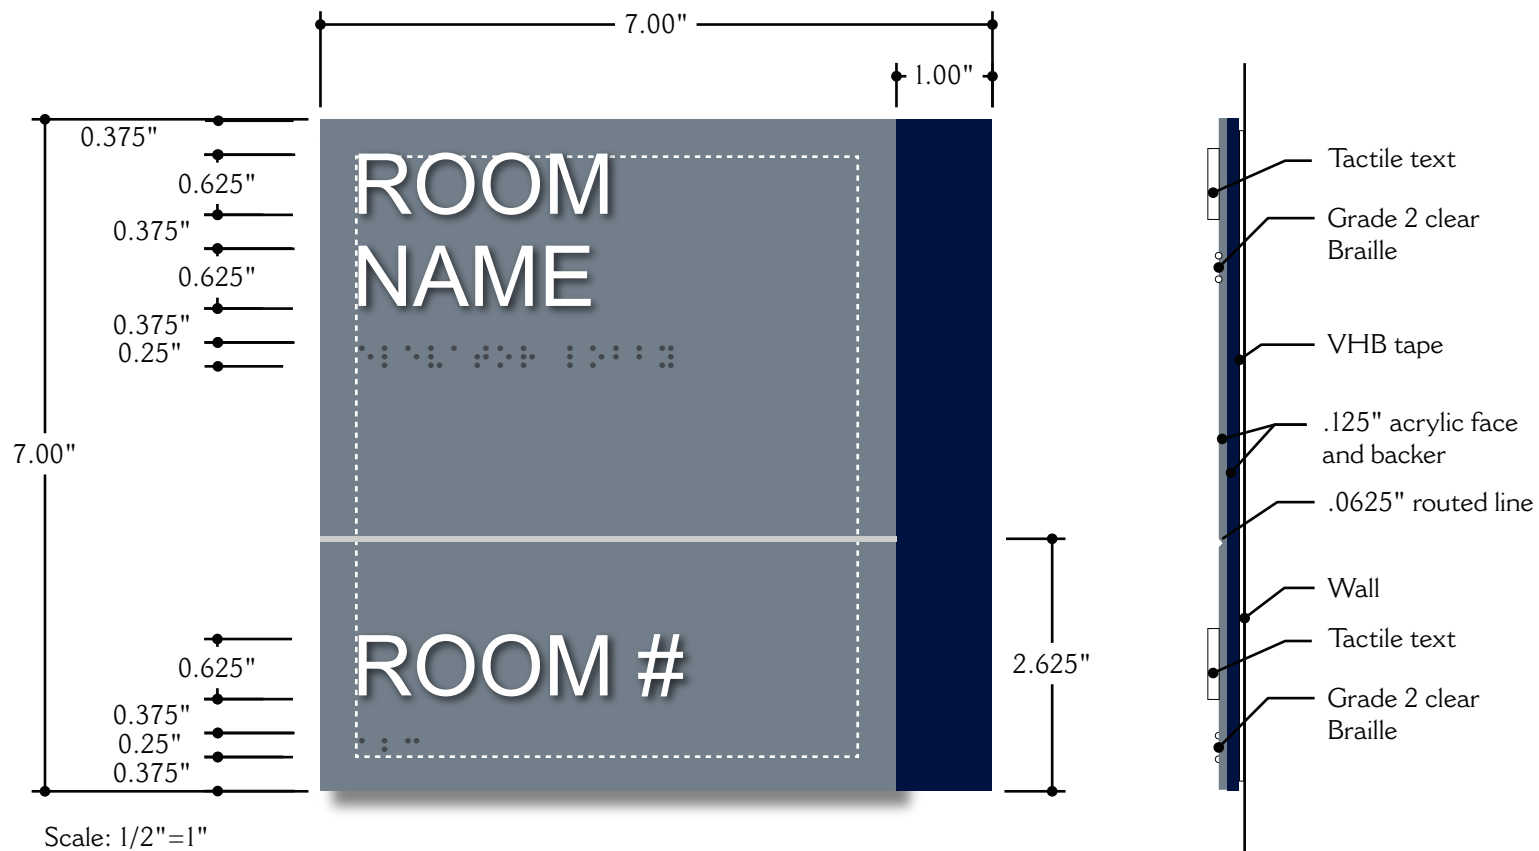

TYPICAL MOUNTING

Sign Type

Standard Room Identification Sign.


ADA compliant.

NOTES

Font:
Arial Regular

MATERIALS

.125" acrylic layers
Tactile graphics
Grade 2 Braille

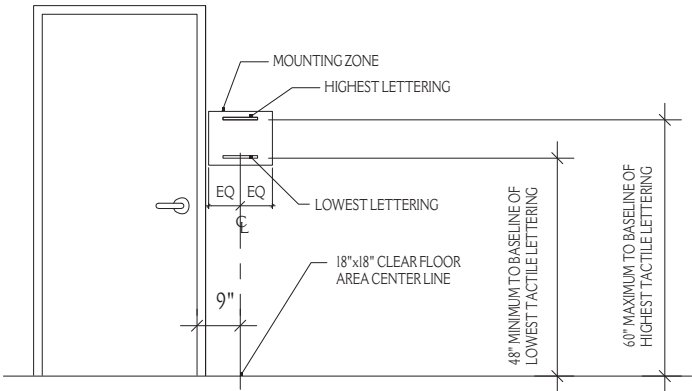

- SIGNS TO BE INSTALLED ON LATCH SIDE OF DOOR (NOTE ON PLANS).
- WHERE THERE IS NO WALL SPACE TO THE LATCH SIDE OF THE DOOR, SIGNS SHALL BE PLACED ON NEAREST ADJACENT WALL (NOTE ON PLANS).
- MOUNT ALL SIGNS SO TOP OF SIGN IS AT THE SAME HEIGHT FOR ALL SPACES.
- *INSTALLATION METHOD*
ROOM SIGNS ARE INSTALLED USING DOUBLE FACE VHB TAPE AND SILICONE. IF WALL SURFACE WILL NOT ACCEPT THIS MOUNTING METHOD THEN MECHANICAL BACKER WILL BE USED. (NOTE ON PLANS)


Note: For preliminary design purposes only.
Accurate field survey and dimension verification
required before beginning construction.

6

| NAVY BLUE | WHITE | GREY |
|---|-----------------------------|--|
| PANTONE 289 COATED C100 M76 Y12 K70 | OPAQUE WHITE C0 M0 Y0 K0 | PANTONE 430 COATED C33 M18 Y13 K40 |
| PANTONE 289 UNCOATED C97 M63 Y13 K41 | R255 G255 B255 #FFFFFF | PANTONE 430 UNCOATED C47 M31 Y29 K4 |
| R0 G14 B47 #000E2F | | R124 G135 B142 #7CB78E |

TYPICAL
SIGNAGE LOCATION

NOT TO SCALE

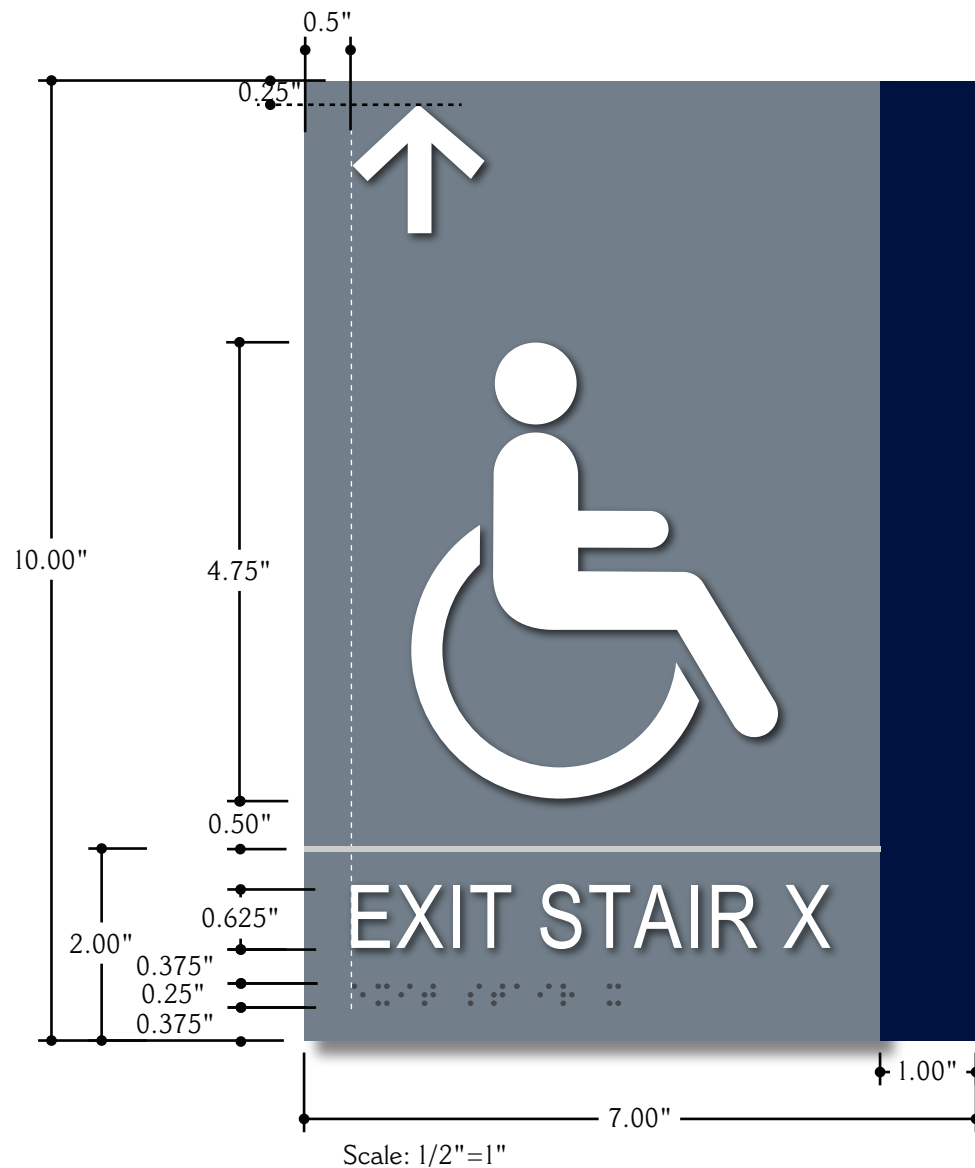


Sign Type

Building Exit Sign

- Includes arrows at the corridor paths.

ADA compliant.

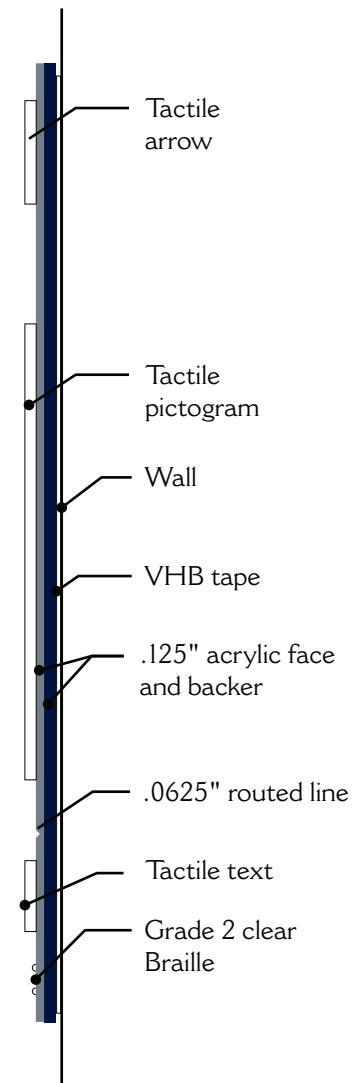

TYPICAL MOUNTING

NOTES


Font:
Arial Narrow

MATERIALS

.125" acrylic layers
Tactile graphics
Grade 2 Braille

Note: For preliminary design purposes only.
Accurate field survey and dimension verification
required before beginning construction.

6

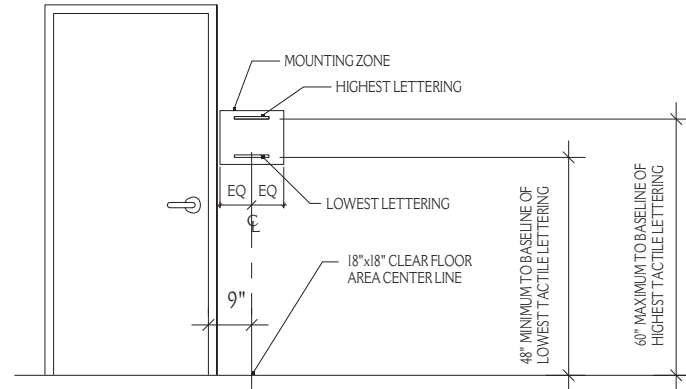

- SIGNS TO BE INSTALLED ON LATCH SIDE OF DOOR (NOTE ON PLANS).
- WHERE THERE IS NO WALL SPACE TO THE LATCH SIDE OF THE DOOR, SIGNS SHALL BE PLACED ON NEAREST ADJACENT WALL (NOTE ON PLANS).
- MOUNT ALL SIGNS SO TOP OF SIGN IS AT THE SAME HEIGHT FOR ALL SPACES.
- *INSTALLATION METHOD*
ROOM SIGNS ARE INSTALLED USING DOUBLE FACE VHB TAPE AND SILICONE. IF WALL SURFACE WILL NOT ACCEPT THIS MOUNTING METHOD THEN MECHANICAL BACKER WILL BE USED. (NOTE ON PLANS)

NAVY BLUE

PANTONE 289 COATED
C100 M76 Y12 K70

PANTONE 289 UNCOATED
C97 M63 Y13 K41

R0 G14 B47
#000E2F

WHITE

OPAQUE WHITE
C0 M0 Y0 K0

R255 G255 B255
#FFFFFF

GREY


PANTONE 430 COATED
C33 M18 Y13 K40

PANTONE 430 UNCOATED
C47 M31 Y29 K4

R124 G135 B142
#7CB78E

TYPICAL SIGNAGE LOCATION

NOT TO SCALE

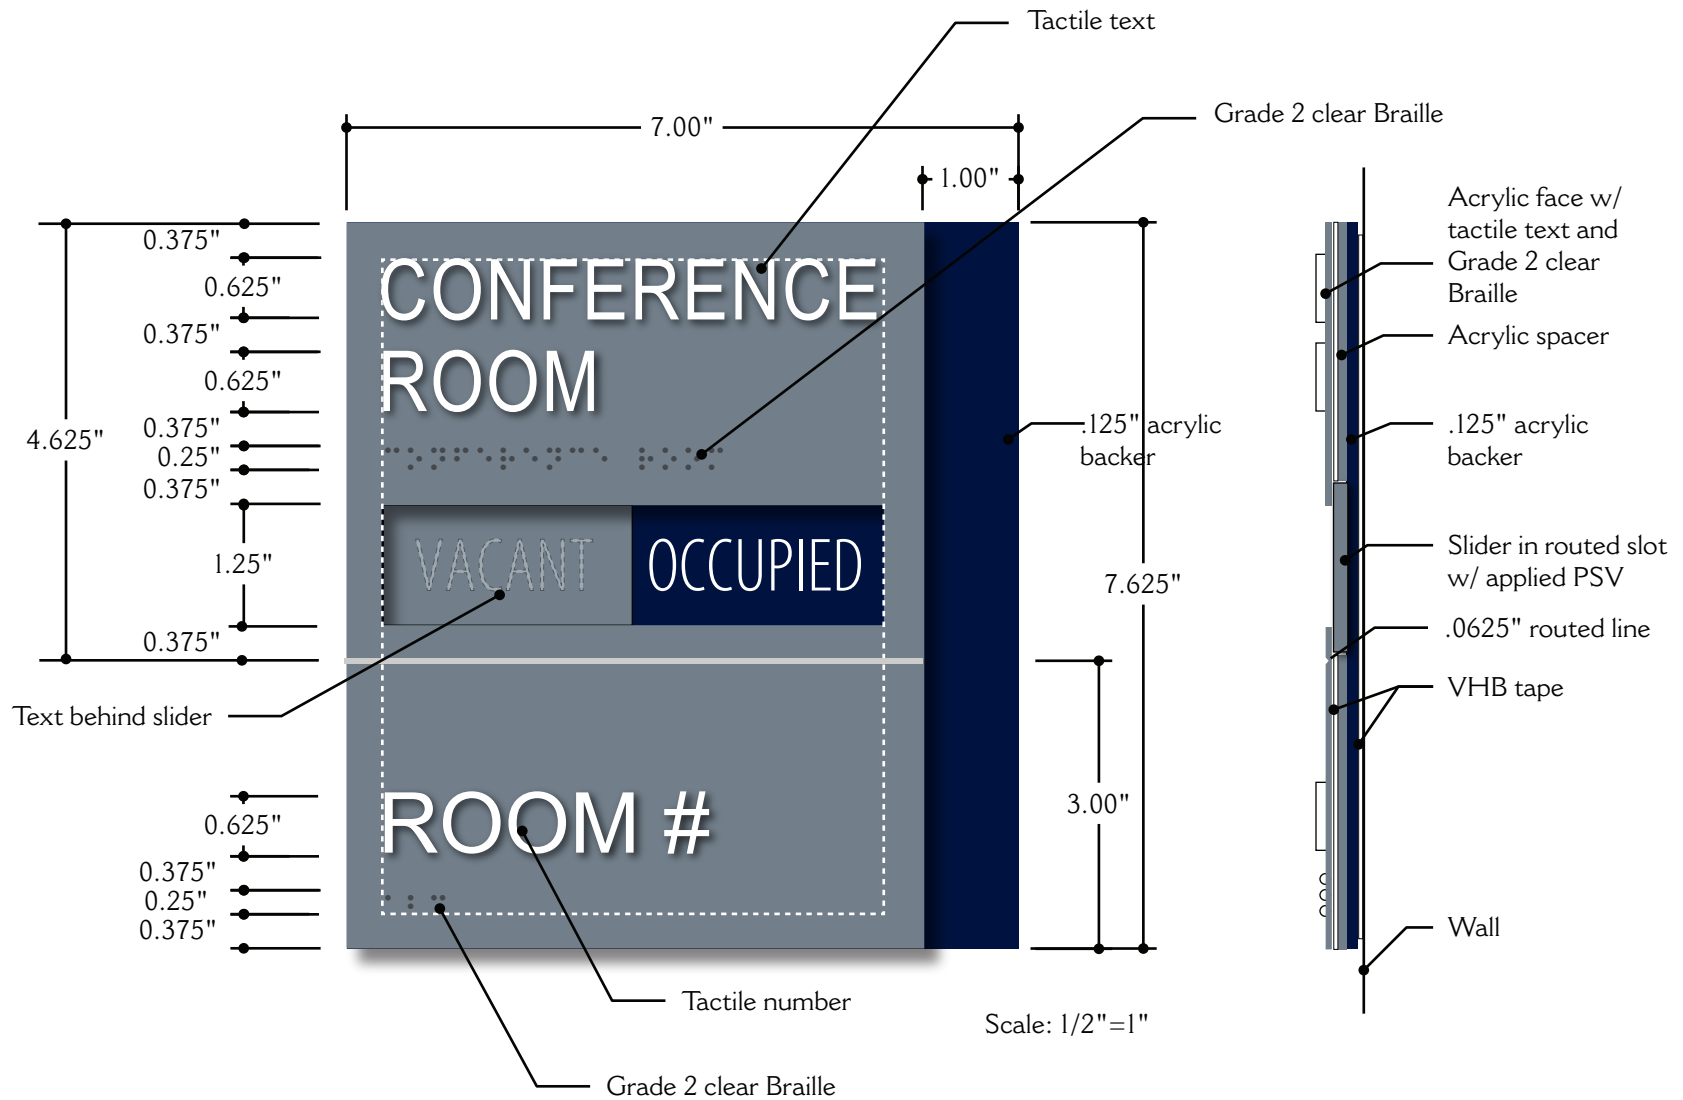

Sign Type

Meeting Room Identification Sign.


ADA compliant.

NOTES

Font:
Arial Narrow
Arial Regular
Myriad Pro Lt Cond (slider text)

MATERIALS

Multi-layer acrylic
Tactile graphics
Grade 2 Braille
HP PSV

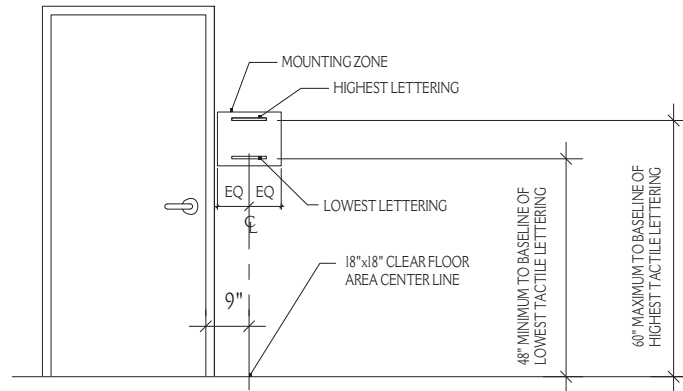

- SIGNS TO BE INSTALLED ON LATCH SIDE OF DOOR (NOTE ON PLANS).
- WHERE THERE IS NO WALL SPACE TO THE LATCH SIDE OF THE DOOR, SIGNS SHALL BE PLACED ON NEAREST ADJACENT WALL (NOTE ON PLANS).
- MOUNT ALL SIGNS SO TOP OF SIGN IS AT THE SAME HEIGHT FOR ALL SPACES.
- *INSTALLATION METHOD*
ROOM SIGNS ARE INSTALLED USING DOUBLE FACE VHB TAPE AND SILICONE..
IF WALL SURFACE WILL NOT ACCEPT THIS MOUNTING METHOD THEN
MECHANICAL BACKER WILL BE USED. (NOTE ON PLANS)


Note: For preliminary design purposes only.
Accurate field survey and dimension verification
required before beginning construction.

6

| NAVY BLUE | WHITE | GREY |
|---|-----------------------------|--|
| PANTONE 289 COATED C100 M76 Y12 K70 | OPAQUE WHITE C0 M0 Y0 K0 | PANTONE 430 COATED C33 M18 Y13 K40 |
| PANTONE 289 UNCOATED C97 M63 Y13 K41 | R255 G255 B255 #FFFFFF | PANTONE 430 UNCOATED C47 M31 Y29 K4 |
| R0 G14 B47 #000E2F | | R124 G135 B142 #7C878E |

TYPICAL SIGNAGE LOCATION

NOT TO SCALE

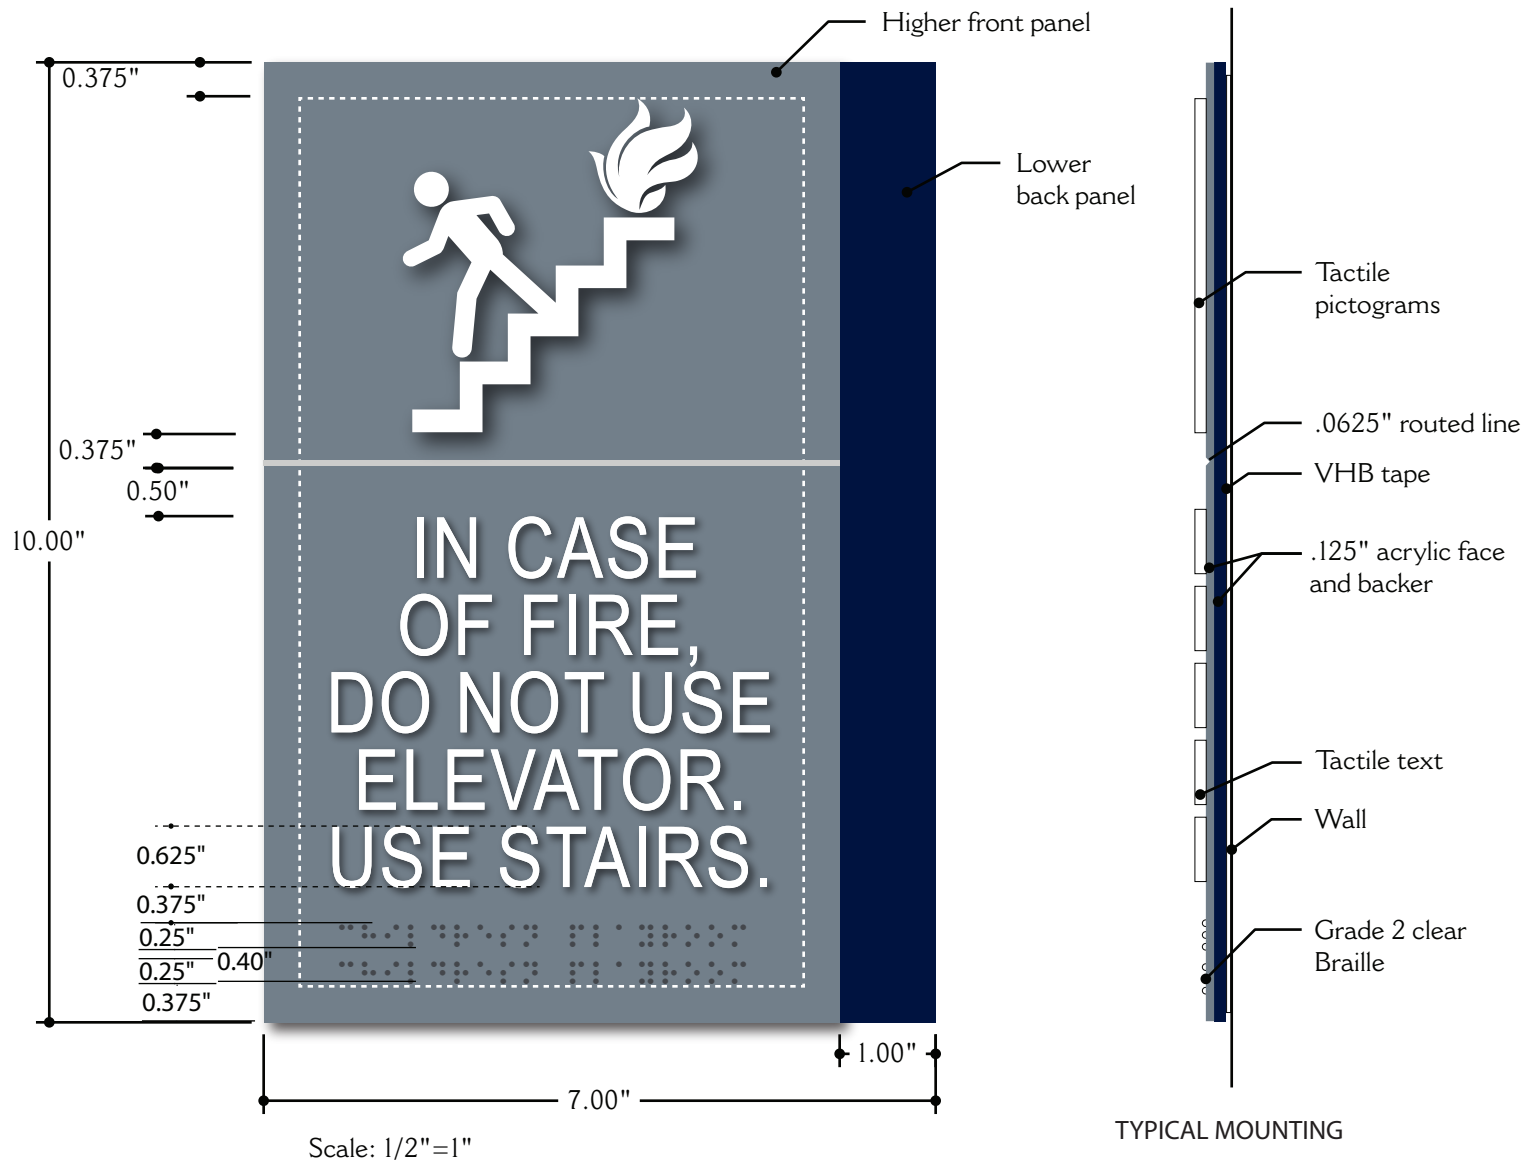

TYPICAL MOUNTING

Sign Type

Elevator Warning Sign.


ADA compliant.

NOTES

Font:
Arial Narrow

MATERIALS

.125" acrylic layers
Tactile graphics
Grade 2 Braille

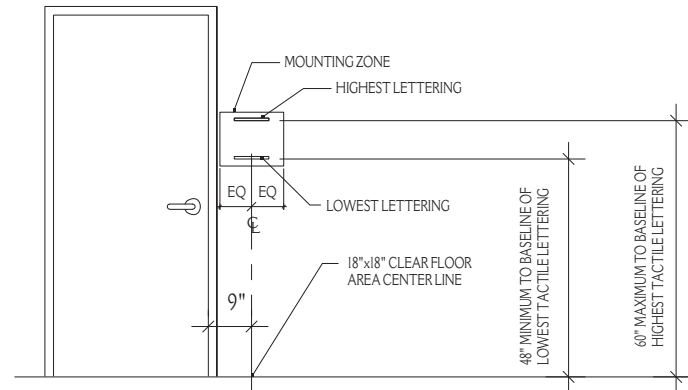

- SIGNS TO BE INSTALLED ON LATCH SIDE OF DOOR (NOTE ON PLANS).
- WHERE THERE IS NO WALL SPACE TO THE LATCH SIDE OF THE DOOR, SIGNS SHALL BE PLACED ON NEAREST ADJACENT WALL (NOTE ON PLANS).
- MOUNT ALL SIGNS SO TOP OF SIGN IS AT THE SAME HEIGHT FOR ALL SPACES.
- INSTALLATION METHOD
ROOM SIGNS ARE INSTALLED USING DOUBLE FACE VHB TAPE AND SILICONE. IF WALL SURFACE WILL NOT ACCEPT THIS MOUNTING METHOD THEN MECHANICAL BACKER WILL BE USED (NOTE ON PLANS)


Note: For preliminary design purposes only.
Accurate field survey and dimension verification
required before beginning construction.

6

| NAVY BLUE | WHITE | GREY |
|---|-----------------------------|--|
| PANTONE 289 COATED C100 M76 Y12 K70 | OPAQUE WHITE C0 M0 Y0 K0 | PANTONE 430 COATED C33 M18 Y13 K40 |
| PANTONE 289 UNCOATED C97 M63 Y13 K41 | R255 G255 B255 #FFFFFF | PANTONE 430 UNCOATED C47 M31 Y29 K4 |
| R0 G14 B47 #000E2F | | R124 G135 B142 #7CB78E |


TYPICAL SIGNAGE LOCATION

NOT TO SCALE

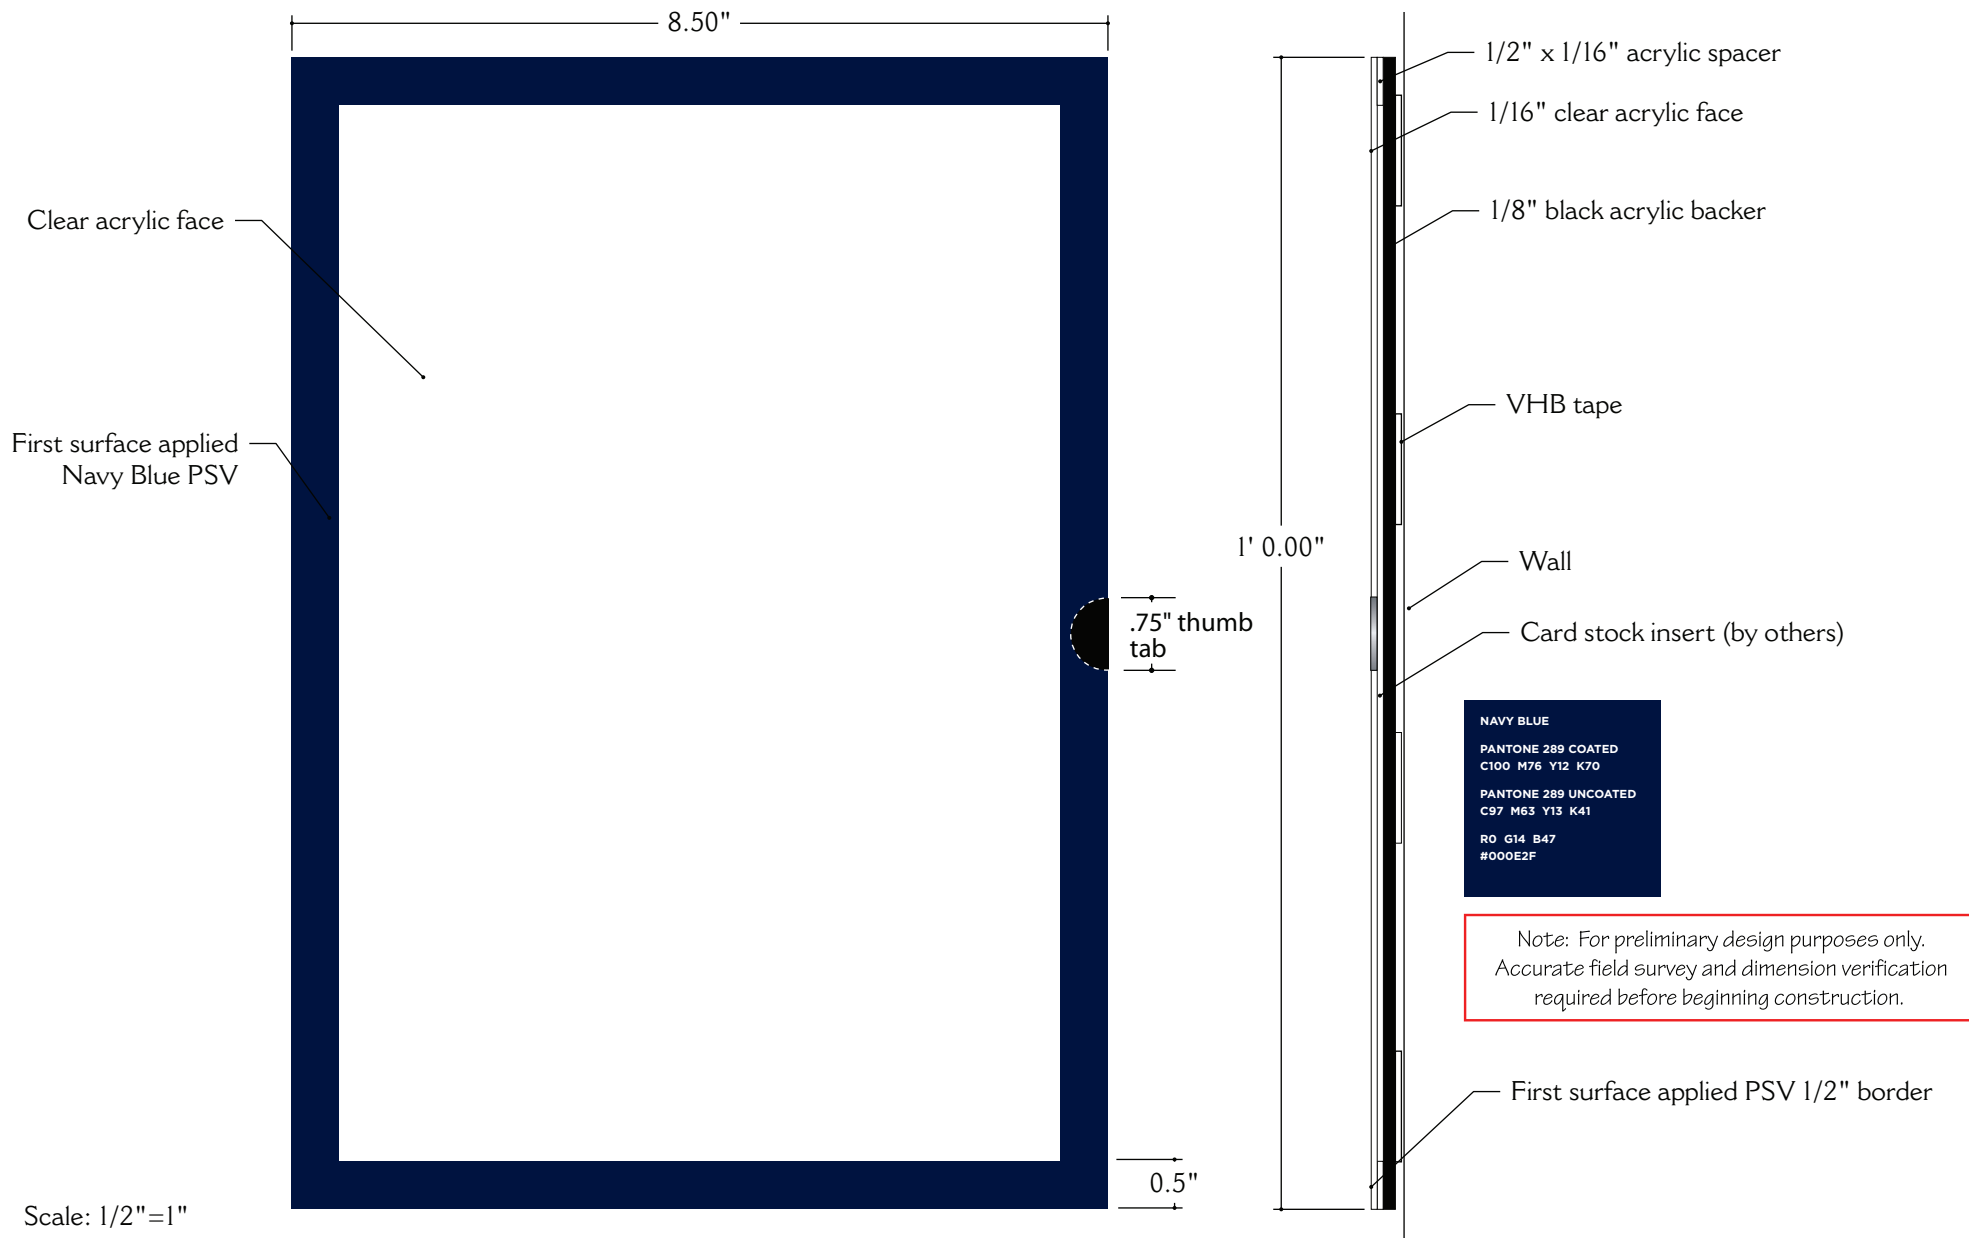


Sign Type

Evac Map Sign

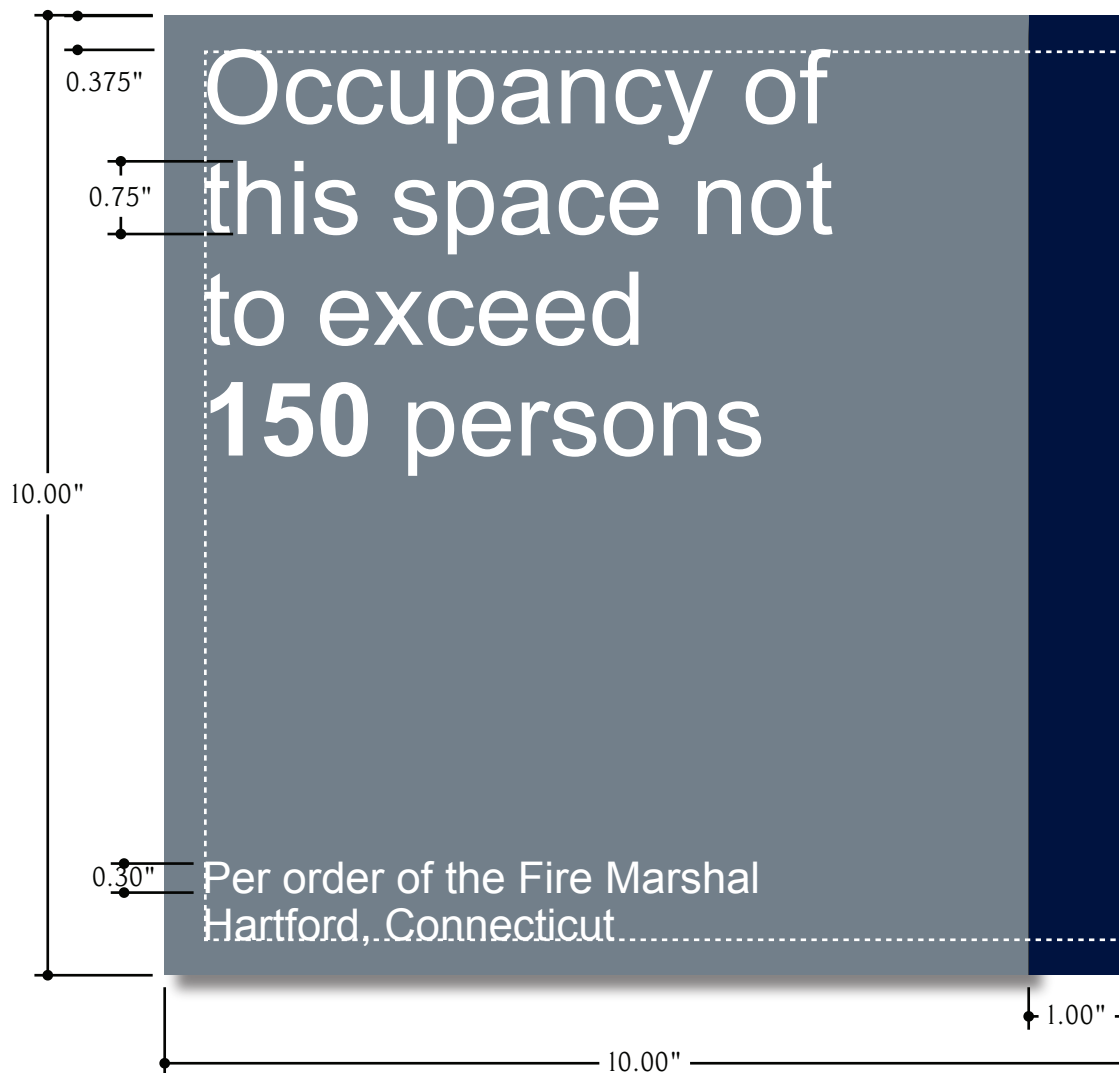

Scale: 1/2"=1"

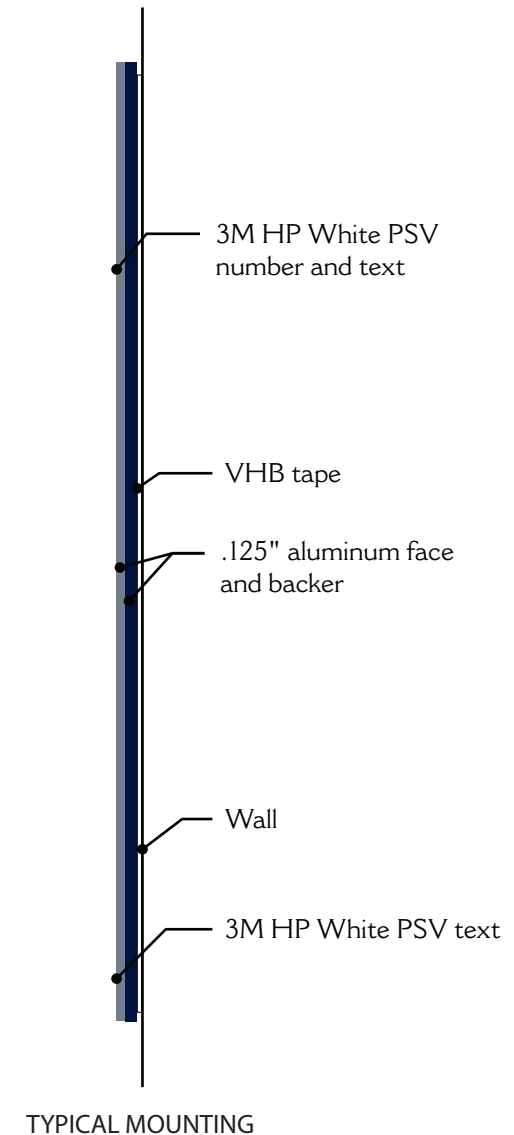

TYPICAL MOUNTING

Sign Type

Max Occupancy Sign - Exterior.


Non-ADA compliant.

NOTES

Font:
Arial Regular
Arial Bold (number)

MATERIALS

.125" painted aluminum layers
HP PSV

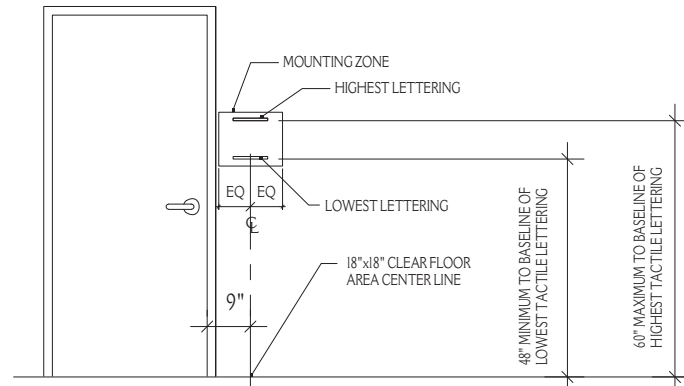

- SIGNS TO BE INSTALLED ON LATCH SIDE OF DOOR (NOTE ON PLANS).
- WHERE THERE IS NO WALL SPACE TO THE LATCH SIDE OF THE DOOR, SIGNS SHALL BE PLACED ON NEAREST ADJACENT WALL (NOTE ON PLANS).
- MOUNT ALL SIGNS SO TOP OF SIGN IS AT THE SAME HEIGHT FOR ALL SPACES.
- *INSTALLATION METHOD*
ROOM SIGNS ARE INSTALLED USING DOUBLE FACE VHB TAPE AND SILICONE. IF WALL SURFACE WILL NOT ACCEPT THIS MOUNTING METHOD THEN MECHANICAL BACKER WILL BE USED . (NOTE ON PLANS)

Note: For preliminary design purposes only.
Accurate field survey and dimension verification
required before beginning construction.

6

| NAVY BLUE | WHITE | GREY |
|---|-----------------------------|--|
| PANTONE 289 COATED C100 M76 Y12 K70 | OPAQUE WHITE C0 M0 Y0 K0 | PANTONE 430 COATED C33 M18 Y13 K40 |
| PANTONE 289 UNCOATED C97 M63 Y13 K41 | R255 G255 B255 #FFFFFF | PANTONE 430 UNCOATED C47 M31 Y29 K4 |
| R0 G14 B47 #000E2F | | R124 G135 B142 #7CB78E |

TYPICAL SIGNAGE LOCATION

NOT TO SCALE